



## Fusion 2

Cena brutto	<b>22 377,39 zł</b>
Cena netto	<b>18 193,00 zł</b>
Dostępność	<b>Dostępny</b>
Czas wysyłki	<b>24 godziny</b>
Numer katalogowy	<b>119.200</b>
Producent	<b>Leister</b>

### Opis produktu

Zwarty, wydajny zestaw, doskonale nadający się do prac przy konstrukcji rur, zbiorników oraz budowie maszyn. Dzięki obrotowemu (360°) butowi spawalniczemu, idealnie nadaje się do wykorzystania w największych przestrzeniach.

#### Dane techniczne:

Napięcie: 230V  
Moc: 2800W  
Częstotliwość: 50 HZ  
Przepływ powietrza (20 s. C) ok. 350 l/m  
Wydajność zgrzewania (HDPE) 1,3 - 1,8 kg/h  
Domieszka zgrzewająca: PE, PP  
Grubość ścianki: 6 - 15 mm  
Folie: >1 mm  
Spoiwo: Ø 4 mm

Waga: 5,9 kg  
Długość: 450 mm

## LEISTER

### The suitable welding shoe for every application

FUSION 2/3/3C/WELDPLAST S2



Seam geometries



Fillet weld seam



V-seam / X-seam



Overlap seam



Corner outside seam



Corner seam



Leister Integrated Air System (IA): The air guidance is integrated into the welding shoe. This enables the turning of the shoe 360° into every desired welding and seam position.


 <b>K-5/6 IA</b> Fillet weld, 5/6 mm Article No.: 145.943	 <b>K-8/10 IA</b> Fillet weld, 8/10 mm Article No.: 145.944	 <b>K-15 IA</b> Fillet weld, 15 mm Article No.: 145.812	 <b>K-20 IA</b> Fillet weld, 20 mm Article No.: 145.940	 <b>K-25 IA</b> Fillet weld, 25 mm Article No.: 145.816
 <b>K-30 IA</b> Fillet weld, 30 mm Article No.: 145.817	 <b>V-5/6 IA</b> V-seam, 5/6 mm Article No.: 145.912	 <b>V-8/10 IA</b> V-seam, 8/10 mm Article No.: 145.915	 <b>V-12 IA</b> V-seam, 12 mm Article No.: 145.907	 <b>V-15 IA</b> V-seam, 15 mm Article No.: 145.903
 <b>UBL-25 IA</b> Overlap seam, 25 mm Article No.: 145.896	 <b>UBL-30 IA</b> Overlap seam, 30 mm Article No.: 145.947	 <b>UBL-35 IA</b> Overlap seam, 35 mm Article No.: 145.897	 <b>V-20 IA</b> V-seam, 20 mm Article No.: 145.909	 <b>V-25 IA</b> V-seam, 25 mm Article No.: 145.916
 <b>V-30 IA</b> V-seam, 30 mm Article No.: 145.905	 <b>CO-8 IA</b> Corner outside, 8 mm Article No.: 146.643	 <b>CO-10 IA</b> Corner outside, 10 mm Article No.: 146.645	 <b>CO-12 IA</b> Corner outside, 12 mm Article No.: 146.649	 <b>CO-15 IA</b> Corner outside, 15 mm Article No.: 146.651
 <b>CL-14 IA</b> Corner seam, 14 mm Article No.: 145.811	 <b>CS-20 IA</b> Corner seam, 20 mm Article No.: 145.488	 <b>45° Angled adapter WP S2</b> Article No.: 139.460	 <b>90° Angled adapter WP S2</b> Article No.: 139.461	 <b>Welding rod de-reflector for 1 heat</b> Article No.: 144.095
		 <b>Pre-heat reflector</b> Article No.: 136.231		

Leister Technologies AG

Switzerland / [www.leister.com](http://www.leister.com)

## Wydajność Extruderów LEISTER

kg/h

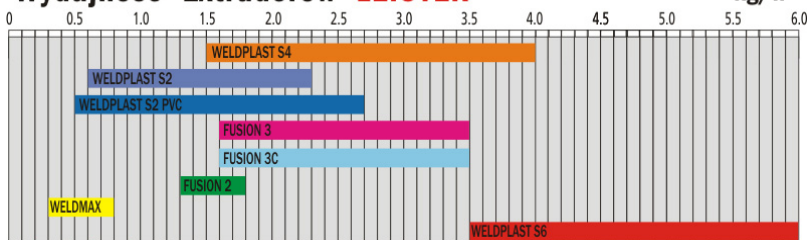

Wydajność zależy od zastosowanego tworzywa!